

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

Table of Contents

1. General

1.1 Scope

2. Input Characteristics

2.1 Input Voltage

2.2 Input Frequency

2.3 Max. Input AC Current

2.4 Inrush Current

2.5 Efficiency

3. Output characteristics

3.1 Normal Operation Output

3.2 Remote On/Off controlled mode

3.3 Regulation

3.4 Rise Time

3.5 Hold-up Time

3.6 5 VSB

3.7 PG-OK

3.8 3.3V Sense

4. Protection

4.1 Input Protection

4.2 Output Protection

5. Start Stability

5.1 No Load Start

5.2 Cold Start

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

6. Environments

6.1 Temperature and Humidity

6.2 Altitude

6.3 Vibration and Shock

7. Conducted EMI

8. Product Safety

8.1 Safety Requirement

8.2 Leakage Current

8.3 Insulation Resistance

8.4 Dielectric Voltage Withstand

9. Power Good Signal

10. MTBF

11. Burn-In

11.1 Input Voltage

11.2 Test Condition

12. Mechanical Specification

12.1 Outline Dimension

12.2 Weight

12.3 Pin Assignment

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

1. General

1.1 Scope

This specification defines the general design and performance requirements for SI-X145M3 REV A0 switching power supply .This power supply can meet the Energy Star computer requirement specified by Environment Protection Agency of America. It also supports remote On/Off control function.Standby voltage and 3.3VDC output which will be the major trend for power supply in future.

2. Input Characteristics

2.1 Input Voltage

Nominal Voltage	Voltage Variation Range
-----	-----
115 Vrms	90 - 132 Vrms
230 Vrms	180 - 264 Vrms

* The power supply is designed to operate in two specified voltage range depending upon outside manual input voltage switch selected. Unless specified the SI-X145M3 shall be set at 230Vac.

2.2 Input Frequency

Nominal Frequency	Frequency Variation Range
-----	-----
50/60 Hz	47 Hz to 63 Hz

* Waveform harmonic distortion will be less than 5%.

* The power supply must operate at above frequency with both 90-132/180-264 Vrms input voltage range.

2.3 Max. Input AC Current

Max. Input Current	Measuring Range
-----	-----
4.0 A	90-132 Vrms
2.0 A	180-264 Vrms

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

2.4 Inrush Current

Less than the ratings of its critical components (Including bulk rectifiers, fuses and surge limiting device).

2.5 Efficiency

SI-X145M3 REV: A0 provides an efficiency of 65 % minimum when measured at full load under 115V/60Hz and 230V/50Hz. condition.

3. Output characteristics

3.1

a. Normal Operation Output

Output Voltage	Load MIN	Range MAX	Regulation	Ripple&Noise Peak-to-Peak Max.	Ripple Peak-to-Peak Max.
1. +5V	0.4A	15.0A	+5% ~ -4%	100 mV	50 mV
2. +12V	0A	3.0A	+5% ~ -5%	200 mV	120 mV
3. -12V	0A	0.3A	+10% ~ -9%	200 mV	200 mV
4.+5Vs	0A	1.0A	+5% ~ -5%	100 mV	100 mV
5. +3.3V	0.5A	12A	+4% ~ -4%	80 mV	50 mV

. The max load can't be over 100W when both DC +5V and +3.3V are used.

NOTE:

1. Noise test should be measured with 20 MHz bandwidth frequency oscilloscope. The output terminal shall add a tantalum capacitor of 10uF in parallel with a ceramic capacitor of 0.1uF.

2. Regulation should cover A +/-20% dynamic output current changed within the static limit of para 3.1 for any one of combination of levels at frequency less than 1 KHz

3.The power supply provide

A.+12V surge current 5A

B. 169 watts peak 15seconds duty cycle 10%

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

3.2 Remote On/Off Controlled mode

When AC power present, the power supply shall be in save mode operation and +5Vsb shall within its regulation window. When there comes a TTL "L" signal inserted, the power supply shall be on. When TTL signal "H" is inserted the power supply shall be off.

TTL level "H" 3.0V - 5.5V
 "L" 0.0V - 0.8V

3.3 Regulation

The cross regulation defined as follows, the output regulation should be within the specified range.

Load	SYM	+5V	+3.3V	+12V	-12V
ALL Max.(1)	HHHH	15.0A	7.5A	3A	0.3A
ALL Max.(2)	HHHH	12A	12A	3A	0.3A
ALL Min.	LLLL	0.4A	0.5A	0.0A	0.0A
+5V Max. others Min	MLLL	8.0A	0.4A	1A	0.0A
+5V Min. others Max.	MHHH	5.0A	12.0A	3A	0.3A
+5V&12Vmax. other Min.	HHSH	12.0A	12A	5A (15SEC)	0.3A

. **The max load can't be over 100W when both DC +5V and +3.3V are used.**

3.4 Rise Time

DC output rise time is less than 100 mS at nominal line and full load.

3.5 Hold-up Time

DC +5V output maintains at least 16mS after power off which hold within para 3.1.

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

3.6 5 VSB

5VSB is required for the implementation of PS-ON described above. 5 VSB is a standby voltage that may be used to power circuits that require power input during the powered-down state of all power rails. The 5 VSB pin should deliver $5V \pm 5\%$ at a minimum of 1 A for PC board circuits to operate. Conversely, PC board should draw no more than 1 A maximum from this pin. This power may be used to operate circuits such as soft power control.

3.7 PG-OK

PG-OK is a power good signal and should be asserted high by power supply to indicate that the +5 VDC and +3.3 VDC outputs are above the under-voltage thresholds of the power supply. When this signal is asserted high, there should be sufficient mains energy stored by the converter to guarantee continuous power operation within specification. Conversely, when either the +5VDC or the +3.3VDC output voltage falls below the under-voltage threshold, or when mains power has been removed for a time sufficiently long so that power supply operation is no longer guaranteed, PG-OK should be deasserted to a low state. See Figure 1 for a representation of the timing characteristics of the PG-OK, PS-ON, and germane power rail signals.

3.8 3.3V Sense

A default 3.3V sense line should be implemented pin 11 of the connector.

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

4. Protection

4.1 Input Protection

In primary circuit of the power supply , a protected fuse is inserted. Only internal fault of the power supply will cause the fuse blown. Any overload or short circuit at DC output will not cause fuse brown or fire hazard.

4.2 Output Protection

4.2.1 Over Voltage Protection

The +5V/+12V DC output are protected against the over voltage condition . Maximum value can't be over 6.5V at 5V terminal and 15.6V at 12V and 4.4V at 3.3V.

4.2.2 Over Power Protection

The power supply can be used electronic circuit to limit the output current against exceeding 30% of surge output power or protected against excessive power delivery since short circuit of any output or over total power at nominal line.

4.2.3 Short Circuit Protection

Short circuit placed on any DC output will shut down all DC outputs and latch.

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

5. Start Stability

5.1 No Load Start

When power is applied to SI-X145M3 REV: A0 with no load connected or under minimum load connected, neither damage to power supply nor hazards to users should occur.

5.2 Cold Start

The power supply shall operate properly when first applied after 8 hours storage in 10 environment.

6. Environments

6.1 Temperature and Humidity

6.1.1 Operating

Temperature 10 to 50 °C

Relative Humidity 20 to 90 %

6.1.2 Storage

Temperature -40 to 60 °C

Relative Humidity 20 to 95 % noncondensing

6.2 Altitude

The power supply can operate normally at any altitude between 0 to 8000 feet.

6.3 Vibration and Shock

6.3.1 Sweep and resonance search for each of X,Y,Z, axis at the sweep rate of 1/octave/min

Frequency	Duration	Amplitude
5 - 20 Hz	15 minutes	0.38 mm
20 - 250 Hz	15 minutes	0.25G

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

7. Conducted EMI

The power supply will comply with FCC DOCKET 20780, Part 15 Class B limit for 115Vac input, FTZ 243 Class B for 230 Vac input and VCCI CLASS 2 requirement.

8. Product Safety

8.1 Safety Requirement

The power supply will be recognized under UL Standard 1950 without D3 deviation, certified with CSA standard C22.2 No.234-M90 safety requirements, and type approval with IEC publication 950 with A2 amendments.

8.2 Leakage Current

The AC leakage current is less than 3.5mA when the power supply connect to 254Vac/50Hz .

8.3 Insulation Resistance

The insulation resistance should be not less than 30M ohm after applying of 500VDC for 1 minute.

8.4 Dielectric Voltage Withstand

The power supply shall withstand for 1 minute without breakdown by the application of a 60Hz 1500V AC voltage applied between both input line and chassis (20mA DC cut-off current). Main transformer shall similarly withstand 3000Vac applied between both primary and secondary windings for a minimum of one minute.

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

9. Power Good Signal

A TTL compatible signal for the purpose of initiating an orderly start-up procedure under normal input operating conditions. During power up, this signal is asserted (low) until +5V is under regulation and AC reaches min. line specification range. After all voltage are going appropriate level, the system may have a turn on delay of 100mS, but no greater than 500mS. During power off the signal should go to low level before +5V is out of regulation. The low level is 0 to 0.8V and high level is 4.75 to 5.25V. The " Power Good "signal can drive up to 6 standard TTL loads.

Time Diagram

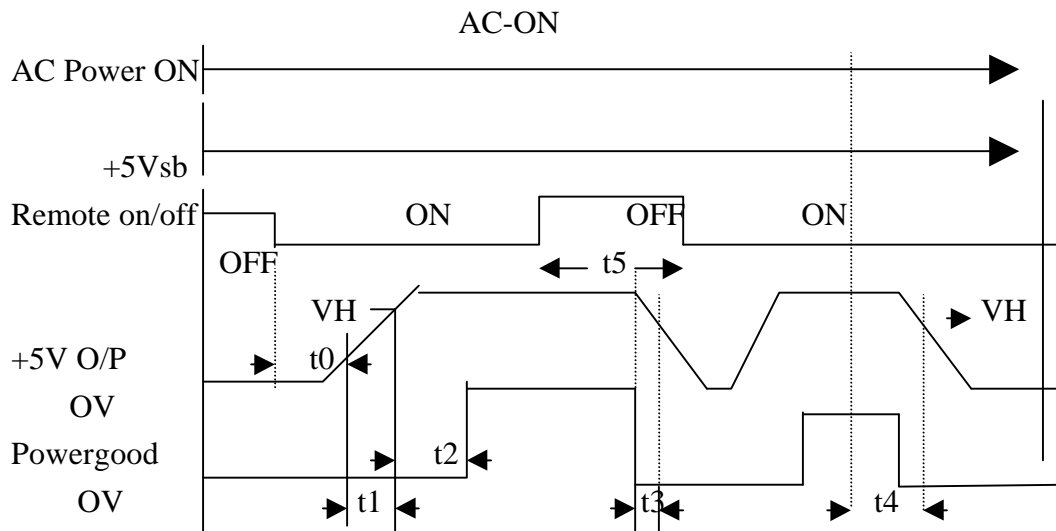


Fig 1

- * t0 : Turn on delay time (20mS-100mS)
- * t1: Rise time (0.1mS-100 mS Max.)
- * t2 : Power good signal turn on delay time(100mS<t3<500mS)
- * t3 : Power good signal turn off delay time(1 ms min)
- * t4 : Power hold-on time (16mS Min.)
- * t5 : t5>1 mS
- *VH: +4.75V for +5V

When the power supply is turned off for a minimum of 1.0 sec. and turn on again, the power good signal will be asserted.

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

10. MTBF

The MTBF of the power supply should be 100,000hrs min , under the condition as below :

1. Input Voltage : 110/220VAC \pm 10%
2. Load : 75% of Max. Load
3. Environmental Temperature : 25⁰C

11. Burn-In

11.1 Input Voltage

Applying 220Vac for 230V model, and 110Vac for 115V.

11.2 Test Condition

Applying 80% loads for the power supply in 45 (+/-5) ⁰C chamber for 4 hours.

12. Mechanical Specification

12.1 Outline Dimension

Please refer the mechanical drawing of SI-X145M3 REV:A0.

12.2 Weight

Maximum weight is 2.0 Kgs.

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

12.3 Pin Designation :

12.3.1 DC CONNECTOR REQUIREMENTS

List or recognized component appliance wiring material(AVLV2) CN rated min 85°C 300VAC shall be used for all output wiring. .

Switching Power Supply Specifications

Model Name : SI-X145M3

Version :A0

12.3.2 BASEBOARD CONNECTOR

P1

CONNECTOR MOLEX 39-01-2200 OR APPROVED EQUIVALENT

18AWG Wire	Signal	Pin	Pin	Signal	18 AWG Wire
Orange(22AWG)	+3.3 VDC	11	1	+3.3 VDC	Orange
Brn (22AWG)	3.3V default sense	11			
Blue	-12 VDC	12	2	+3.3 VDC	Orange
Black	COM	13	3	COM	Black
Green	PS-ON	14	4	+5 VDC	Red
Black	COM	15	5	COM	Black
Black	COM	16	6	+5 VDC	Red
Black	COM	17	7	COM	Black
NC	Reserved	18	8	POK	Gray
Red	+5 VDC	19	9	+5 Vsb	Purple
Red	+5 VDC	20	10	+12 VDC	Yellow

12.3.3 PERIPHERAL CONNECTORS

P3 P5 P6

P4

Connector : AMP 1-480424-0 or MOLEX 8981-04P or approved equivalent

Connector : AMP 171822-4 or approved equivalent

Contacts : AMP 61314-1 terminals or equiv

Pin	Signal	18 AWG Wire	Pin	Signal	22 AWG Wire
1	+12 VDC	Yellow	1	+5 VDC	Red
2	COM	Black	2	COM	Black
3	COM	Black	3	COM	Black
4	+5 VDC	Red	4	+12 VDC	Yellow