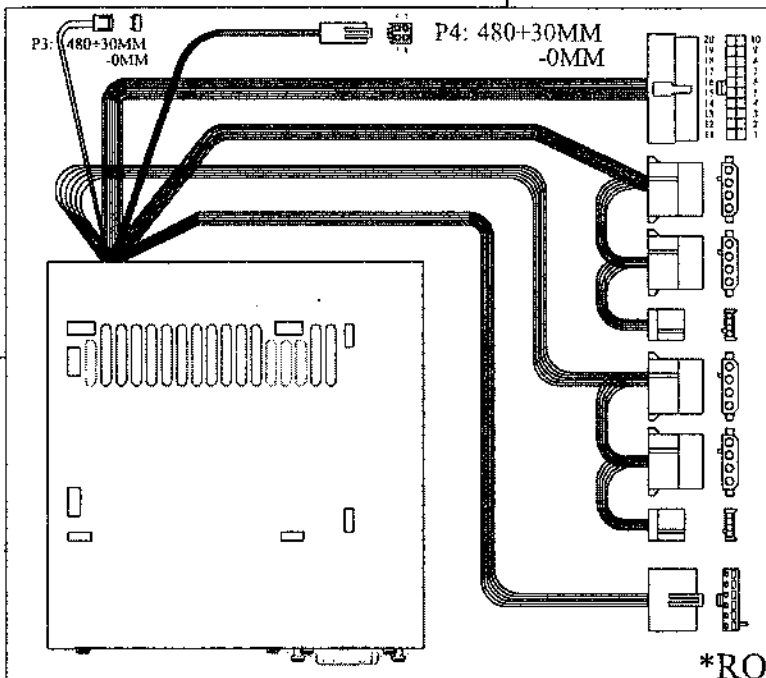

DIM:	
PA:	300+30MM -0MM
PB:	300+30MM -0MM
PC:	155+30MM -0MM
PD:	155+30MM -0MM
PE:	300+30MM -0MM
PF:	155+30MM -0MM
PG:	155+30MM -0MM
P6:	400+30MM -0MM

PA

PIN	COLOR	V
1	ORANGE	+3.3V
2	ORANGE	+3.3V
3	BLACK	COMMON
4	RED	+5V
5	BLACK	COMMON
6	RED	+5V
7	BLACK	COMMON
8	GRAY	POWER GOOD
9	PURPLE	+5V S
10	YELLOW	+12V
11	ORANGE	+3.3V
12	BLUE	-12V
13	BLACK	COMMON
14	GREEN	P.S-ON
15	BLACK	COMMON
16	BLACK	COMMON
17	BLACK	COMMON
18	WHITE	-5V
19	RED	+5V
20	RED	+5V

PA

PIN	COLOR	V
2	ORANGE	+3.3V*SENSE
7	BLACK	+3.3V*SENSE

PB/PC/PE/PF

PIN	COLOR	V
1	YELLOW	+12V
2	BLACK	GND
3	BLACK	GND
4	RED	+5V

PD/PG

PIN	COLOR	V
4	YELLOW	+12V
3	BLACK	GND
2	BLACK	GND
1	RED	+5V

P6

PIN	COLOR	V
1	BLACK	COM
2	BLACK	COM
3	BLACK	COM
4	ORANGE	+3.3V
5	ORANGE	+3.3V
6	RED	+5V

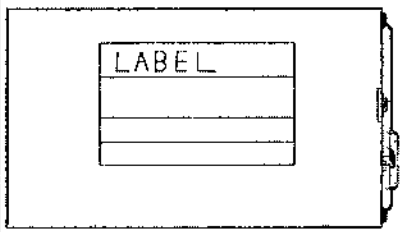

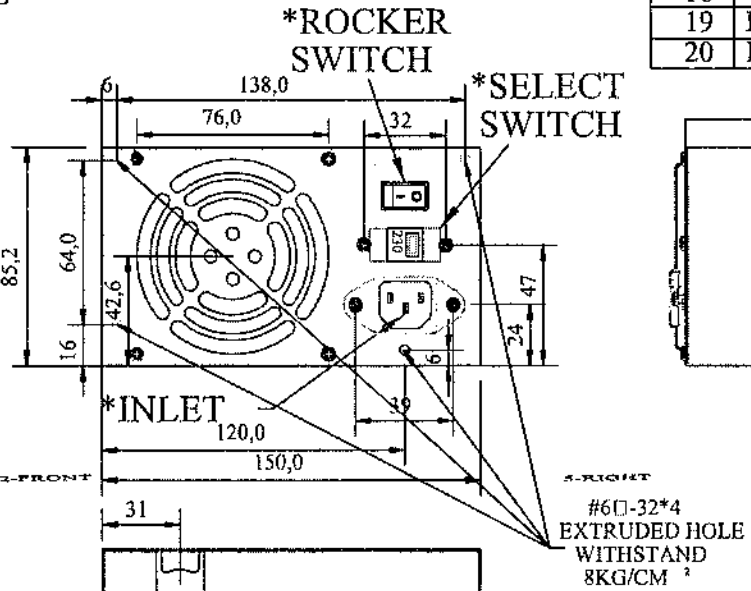

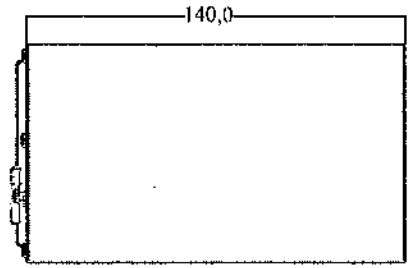

P3 FAN M		
PIN	COLOR	V
1	BLACK	GND
2		
3	YELLOW	FAN M

P4: +12V Power Connector (For ATX12V configurations only)		
Connector: MOLEX 39-01-2040 or equivalent		
PIN	COLOR	V
1	BLACK	COM
2	BLACK	COM
3	YELLOW	+12V
4	YELLOW	+12V

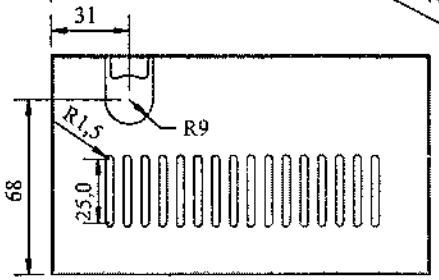

PARTS LIST

QTY REQD	FSCM NO	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: x.0 ±0.2, x.x ±0.15, x.xx ±0.1

CONTRACT NO. HPC-250-202 12V

DRAWN KENNY.HSIEH

CHECKED

APPROVED

MATERIAL SECC 0.8t

FINISH 90/03/27

DEBURR AND BREAK SHARP CHIEFTEC

SIRTEC 協益電子股份有限公司 電子事業處
SIRTEC INTERNATIONAL CO., LTD.

SIZE A4 REV: A0 PART NO 91.25022.B05

SCALE 1:1 MM DWG NO. 20010327C