

PA

PIN	COLOR	V
1	ORANGE	+3.3V*SENSE

PD

PIN	COLOR	V
4	YELLOW	+12V
3	BLACK	GND
2	BLACK	GND
1	RED	+5V

PB/PC/PE/PF





PIN	COLOR	V
1	YELLOW	+12V
2	BLACK	GND
3	BLACK	GND
4	RED	+5V

PA

PIN	COLOR	V
1	ORANGE	+3.3V
2	ORANGE	+3.3V
3	BLACK	COMMON
4	RED	+5V
5	BLACK	COMMON
6	RED	+5V
7	BLACK	COMMON
8	GRAY	POWER GOOD
9	PURPLE	+5V S
10	YELLOW	+12V
11	ORANGE	+3.3V
12	BLUE	-12V
13	BLACK	COMMON
14	GREEN	P-S-ON
15	BLACK	COMMON
16	BLACK	COMMON
17	BLACK	COMMON
18		
19	RED	+5V
20	RED	+5V

DIM:

PA: L=330+30MM - 0MM
PB: L=150+30MM - 0MM
PC: L=330+30MM - 0MM
PD: L=150+30MM - 0MM
PE: L=150+30MM - 0MM
PF: L=330+30MM - 0MM

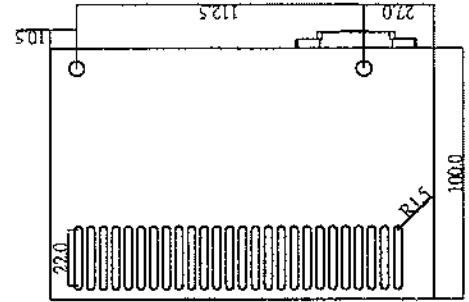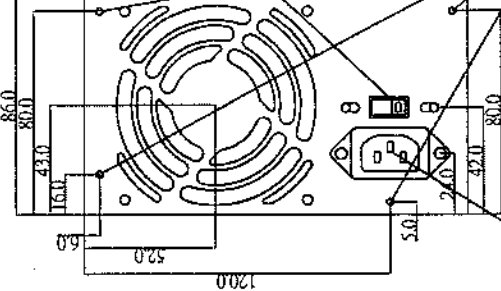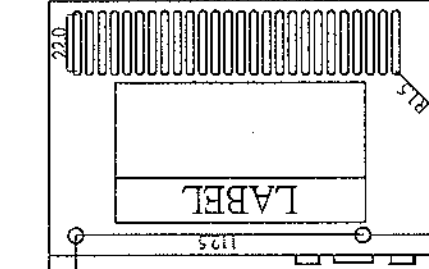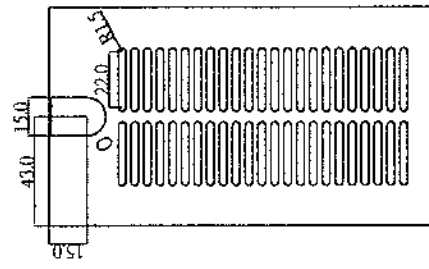

No.6-32*4
EXTRUDED HOLE

#INLET

REV. NO.	REV. DATE	REV. BY	REV. REASON
1			

DESIGNER: KENNY HSHIEH
CHECKER: PA
DATE: 90/03/15
TIME: 11:11

PROJECT: HPL-200-201
ITEM: KENNY HSHIEH
REV: CO
REV: A4
REV: 91.20021.001
MM
MM
20010315A

協益電子股份有限公司
SIRTEC INTERNATIONAL CO., LTD.
電子研業處